

IMAGING PERFORMANCE SPECIFICATION

FLIR *FLEA*[®]3 *USB3 Vision*



USB[™]
VISION

Version 4.1
Revised 1/26/2017



FCC Compliance

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesirable operation.

Korean EMC Certification

The KCC symbol indicates that this product complies with Korea's Electrical Communication Basic Law regarding EMC testing for electromagnetic interference (EMI) and susceptibility (EMS).

Hardware Warranty

The warranty for the Flea3 USB 3.1 camera is 3 years. For detailed information on how to repair or replace your camera, please see the [terms and conditions on our website](#).

WEEE

The symbol indicates that this product may not be treated as household waste. Please ensure this product is properly disposed as inappropriate waste handling of this product may cause potential hazards to the environment and human health. For more detailed information about recycling of this product, please contact us.



Trademarks

Names and marks appearing on the products herein are either registered trademarks or trademarks of FLIR Systems, Inc. and/or its subsidiaries.

Licensing

To view the licenses of open source packages used in this product please see [What open source packages does firmware use?](#)

1 Specifications


Model	Sensor	Maximum Resolution	Pixel Size	Firmware	Results
FL3-U3-13E4M-C	e2v EV76C560, 1/1.8", Mono	1280 x 1024	5.3 μm	2.15.3.3	page 2
FL3-U3-13E4C-C	e2v EV76C560, 1/1.8", Color	1280 x 1024	5.3 μm	2.15.3.3	page 3
FL3-U3-13S2M-CS	Sony IMX035, 1/3", Mono	1328 x 1048	3.63 μm	2.14.3.1	page 4
FL3-U3-13S2C-CS	Sony IMX035, 1/3", Color	1328 x 1048	3.63 μm	2.14.3.1	page 5
FL3-U3-13Y3M-C	On Semi VITA1300, 1/2", Mono	1280 x 1024	4.8 μm	2.7.3.0	page 6
FL3-U3-20E4M-C	e2v EV76C5706F, 1/1.8", Mono	1600 x 1200	4.5 μm	2.17.3.0	page 7
FL3-U3-20E4C-C	e2v EV76C5706F, 1/1.8", Color	1600 x 1200	4.5 μm	2.17.3.0	page 8
FL3-U3-32S2M-CS	Sony IMX036, 1/2.8", Mono	2080 x 1552	2.5 μm	2.14.3.1	page 9
FL3-U3-32S2C-CS	Sony IMX036, 1/2.8", Color	2080 x 1552	2.5 μm	2.14.3.1	page 10
FL3-U3-120S3C-C	Sony IMX172, 1/2.3", Color	4000 x 3000	1.55 μm	2.19.3.4	page 11



Measurements are taken based on guidelines in the EMVA 1288 standard; the full definition can be found at EMVA.org. Camera settings are at maximum bit depth unless otherwise noted. Temporal Dark Noise is measured at minimum exposure time. The center wavelength is 525 nm unless otherwise noted. The pixel format is Raw 16 or Mono 16 for mono cameras and Raw 16 for color cameras. Results are captured at room temperature (20°C).


2 FL3-U3-13E4M-C Imaging Performance

Measurement	Video Mode 0	Video Mode 7
Pixel Clock (MHz)	114	114
ADC (Bits)	10-bit	10-bit
Quantum Efficiency (% at 525 nm)	63	64.57
Temporal Dark Noise (Read Noise) (e-)	25.12	11.28
Signal to Noise Ratio Maximum (dB)	39.85	39.87
Signal to Noise Ratio Maximum (Bits)	6.62	6.62
Absolute Sensitivity Threshold (γ)	40.65	18.59
Saturation Capacity (Well Depth) (e-)	9650	9701
Dynamic Range (dB)	51.52	58.31
Dynamic Range (Bits)	8.56	9.69
Gain (e-/ADU)	0.16	0.16

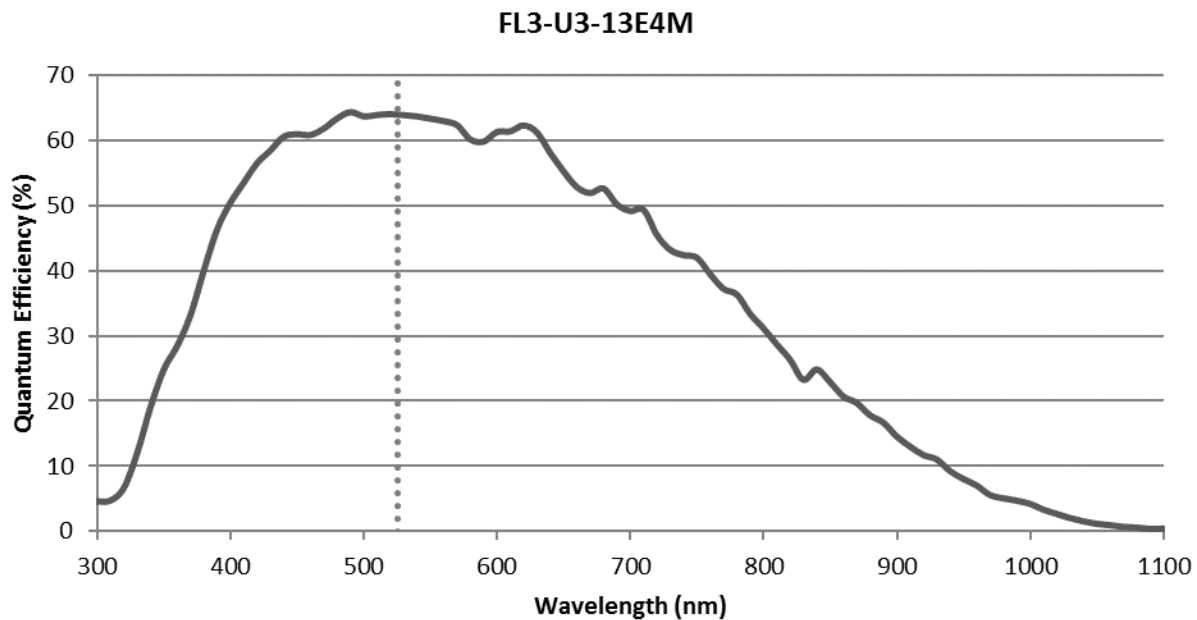


3 FL3-U3-13E4C-C Imaging Performance

Measurement	Video Mode 0	Video Mode 7
Pixel Clock (MHz)	114	114
ADC (Bits)	10-bit	10-bit
Quantum Efficiency Blue (% at 470 nm)	50	50
Quantum Efficiency Green (% at 525 nm)	49	49
Quantum Efficiency Red (% at 640 nm)	49	49
Temporal Dark Noise (Read Noise) (e-)	26.08	14.33
Signal to Noise Ratio Maximum (dB)	40.15	40.09
Signal to Noise Ratio Maximum (Bits)	6.67	6.66
Absolute Sensitivity Threshold (γ)	55.07	30.91
Saturation Capacity (Well Depth) (e-)	10357	10197
Dynamic Range (dB)	51.82	56.75
Dynamic Range (Bits)	8.61	9.43
Gain (e-/ADU)	0.17	0.17

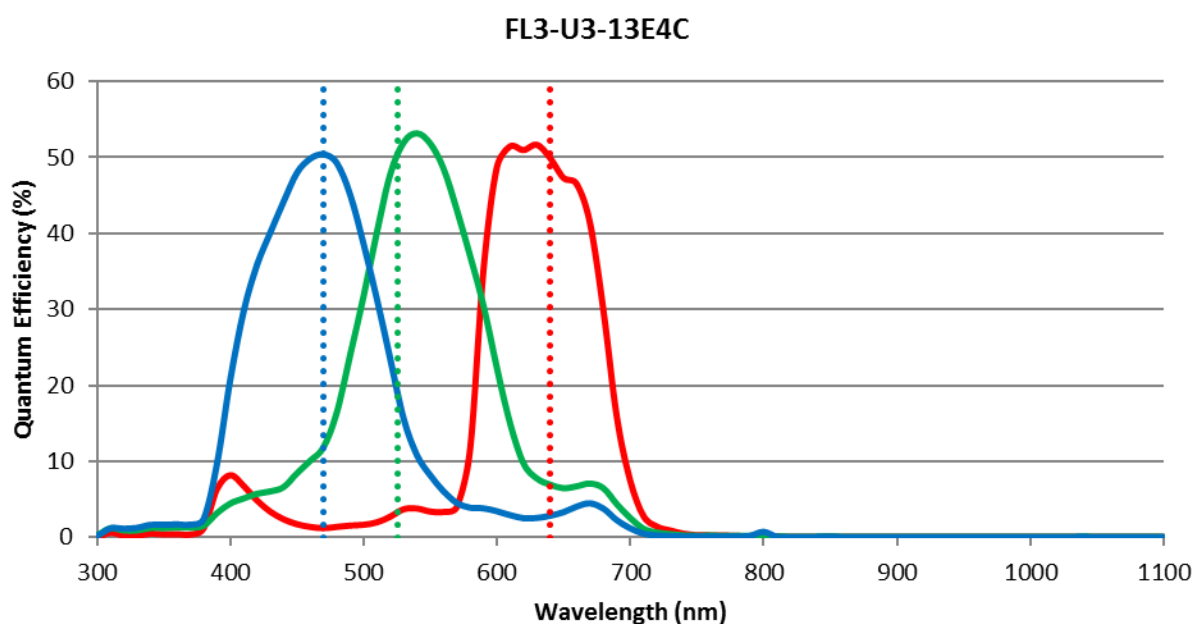


4 FL3-U3-13S2M-CS Imaging Performance

Measurement	Video Mode 0	Video Mode 7
Pixel Clock (MHz)	216	108
ADC (Bits)	12-bit	12-bit
Quantum Efficiency (% at 525 nm)	76	75
Temporal Dark Noise (Read Noise) (e-)	8.94	6.31
Signal to Noise Ratio Maximum (dB)	42.07	42.07
Signal to Noise Ratio Maximum (Bits)	6.99	6.99
Absolute Sensitivity Threshold (γ)	12.78	9.23
Saturation Capacity (Well Depth) (e-)	16090	16092
Dynamic Range (dB)	64.64	67.47
Dynamic Range (Bits)	10.74	11.21
Gain (e-/ADU)	0.27	0.27

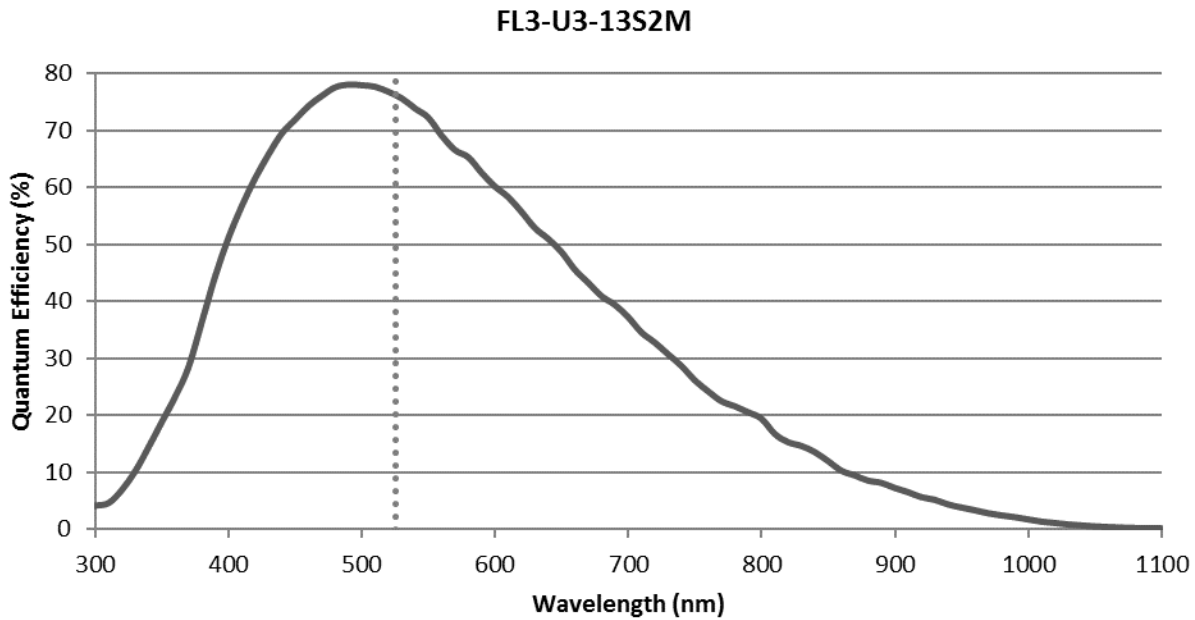


5 FL3-U3-13S2C-CS Imaging Performance

Measurement	Video Mode 0	Video Mode 7
Pixel Clock (MHz)	216	216
ADC (Bits)	12-bit	12-bit
Quantum Efficiency Blue (% at 470 nm)	57	57
Quantum Efficiency Green (% at 525 nm)	54	58
Quantum Efficiency Red (% at 640 nm)	40	40
Temporal Dark Noise (Read Noise) (e-)	9.03	5.23
Signal to Noise Ratio Maximum (dB)	41.86	41.74
Signal to Noise Ratio Maximum (Bits)	6.95	6.93
Absolute Sensitivity Threshold (γ)	18.44	11.17
Saturation Capacity (Well Depth) (e-)	15344	14919
Dynamic Range (dB)	64.14	68.31
Dynamic Range (Bits)	10.65	11.35
Gain (e-/ADU)	0.26	0.26

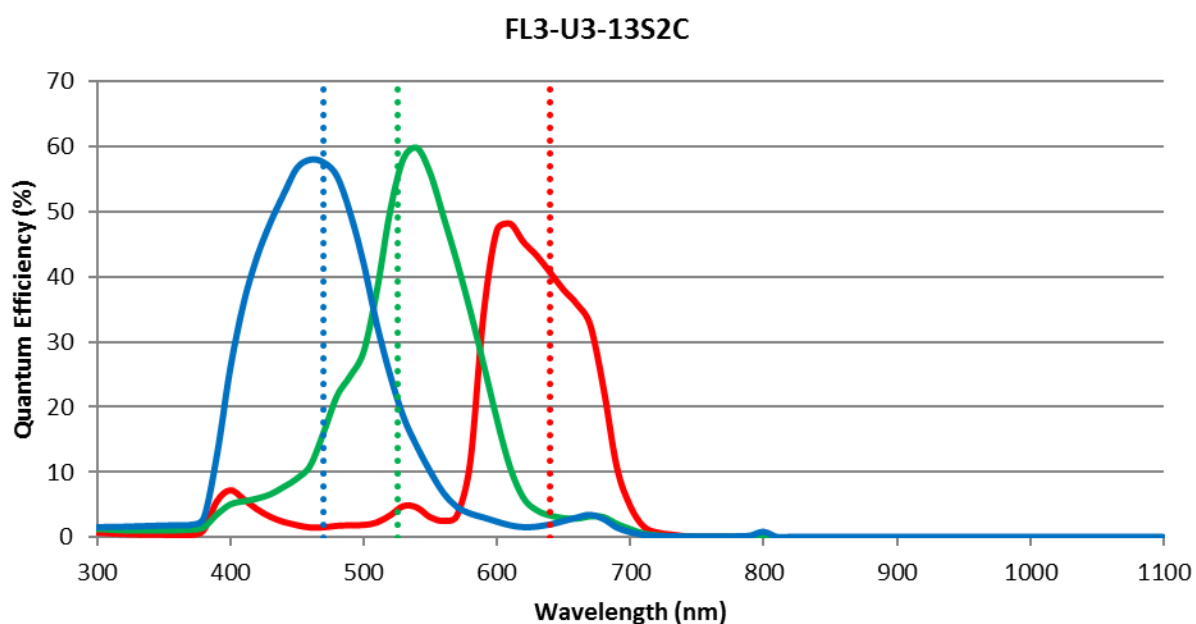


6 FL3-U3-13Y3M-C Imaging Performance

Measurement	Video Mode 0
Pixel Clock (MHz)	248
ADC (Bits)	10-bit
Quantum Efficiency (% at 525 nm)	62
Temporal Dark Noise (Read Noise) (e-)	33.51
Signal to Noise Ratio Maximum (dB)	40.27
Signal to Noise Ratio Maximum (Bits)	6.69
Absolute Sensitivity Threshold (γ)	55.46
Saturation Capacity (Well Depth) (e-)	10651
Dynamic Range (dB)	49.91
Dynamic Range (Bits)	8.29
Gain (e-/ADU)	0.22

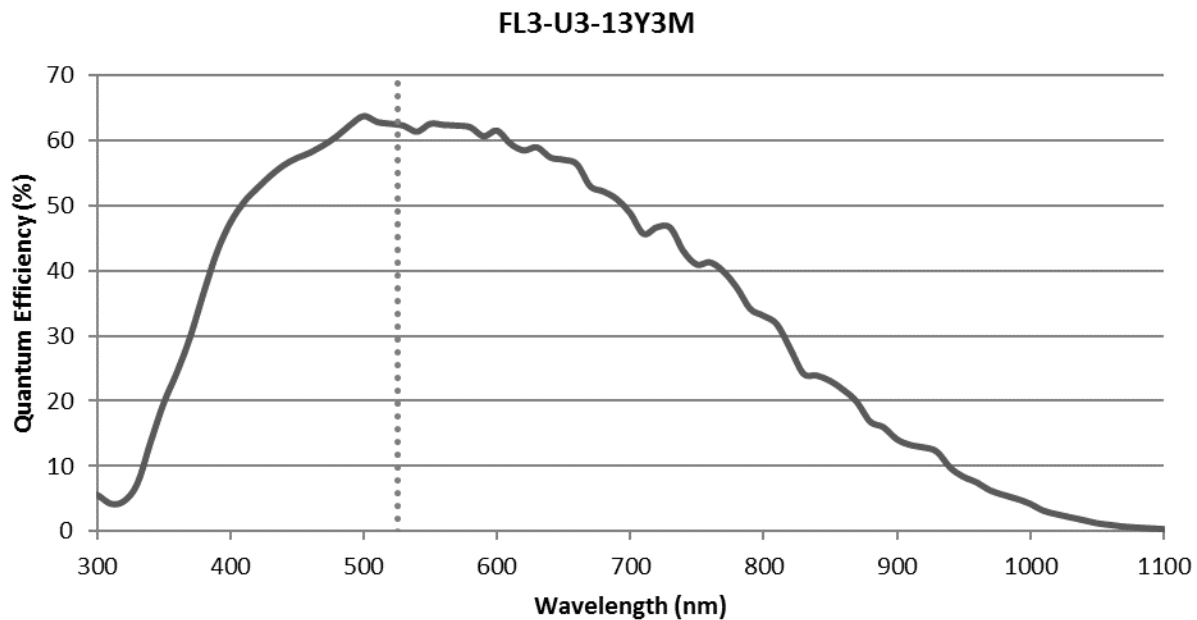


7 FL3-U3-20E4M-C Imaging Performance

Measurement	Video Mode 0	Video Mode 7
Pixel Clock (MHz)	120	120
ADC (Bits)	10-bit	10-bit
Quantum Efficiency (% at 525 nm)	49	52
Temporal Dark Noise (Read Noise) (e ⁻)	21.53	8.4
Signal to Noise Ratio Maximum (dB)	37.80	39.89
Signal to Noise Ratio Maximum (Bits)	6.28	6.63
Absolute Sensitivity Threshold (γ)	45.28	16.99
Saturation Capacity (Well Depth) (e ⁻)	6018	9759
Dynamic Range (dB)	48.73	60.80
Dynamic Range (Bits)	8.09	10.10
Gain (e ⁻ /ADU)	0.11	0.17

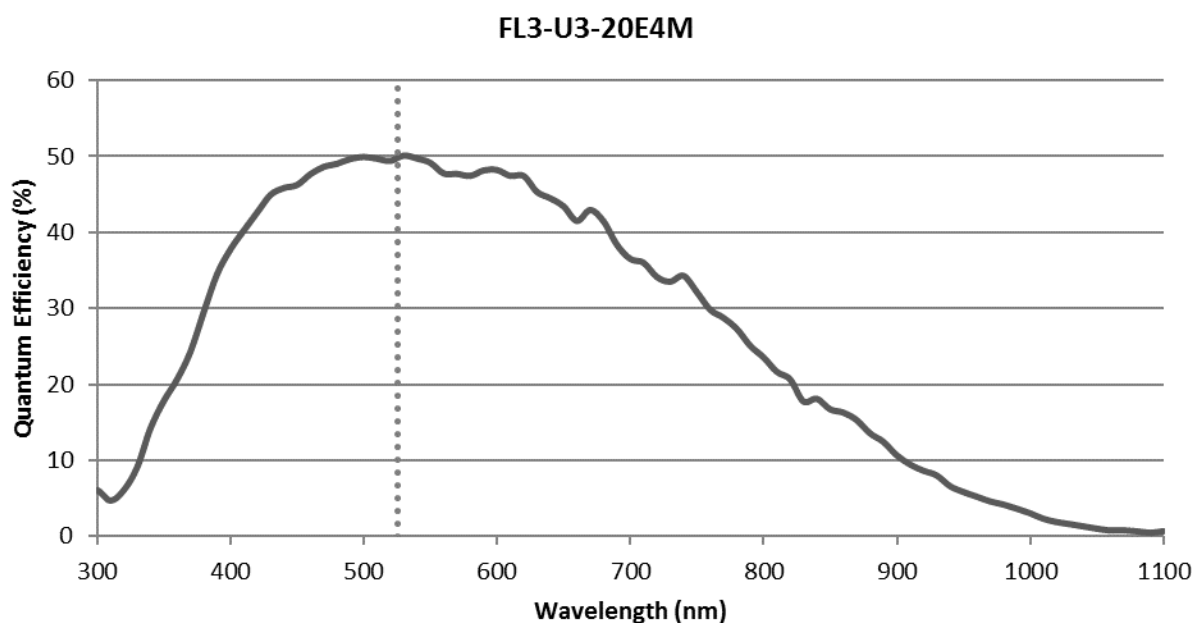


8 FL3-U3-20E4C-C Imaging Performance

Measurement	Video Mode 0	Video Mode 7
Pixel Clock (MHz)	120	120
ADC (Bits)	10-bit	10-bit
Quantum Efficiency Blue (% at 470 nm)	38	40
Quantum Efficiency Green (% at 525 nm)	37	40
Quantum Efficiency Red (% at 640 nm)	35	36
Temporal Dark Noise (Read Noise) (e ⁻)	20.84	7.87
Signal to Noise Ratio Maximum (dB)	37.67	39.86
Signal to Noise Ratio Maximum (Bits)	6.26	6.62
Absolute Sensitivity Threshold (γ)	58.99	21.51
Saturation Capacity (Well Depth) (e ⁻)	5853	9676
Dynamic Range (dB)	46.76	61.26
Dynamic Range (Bits)	8.10	10.17
Gain (e ⁻ /ADU)	0.10	0.16

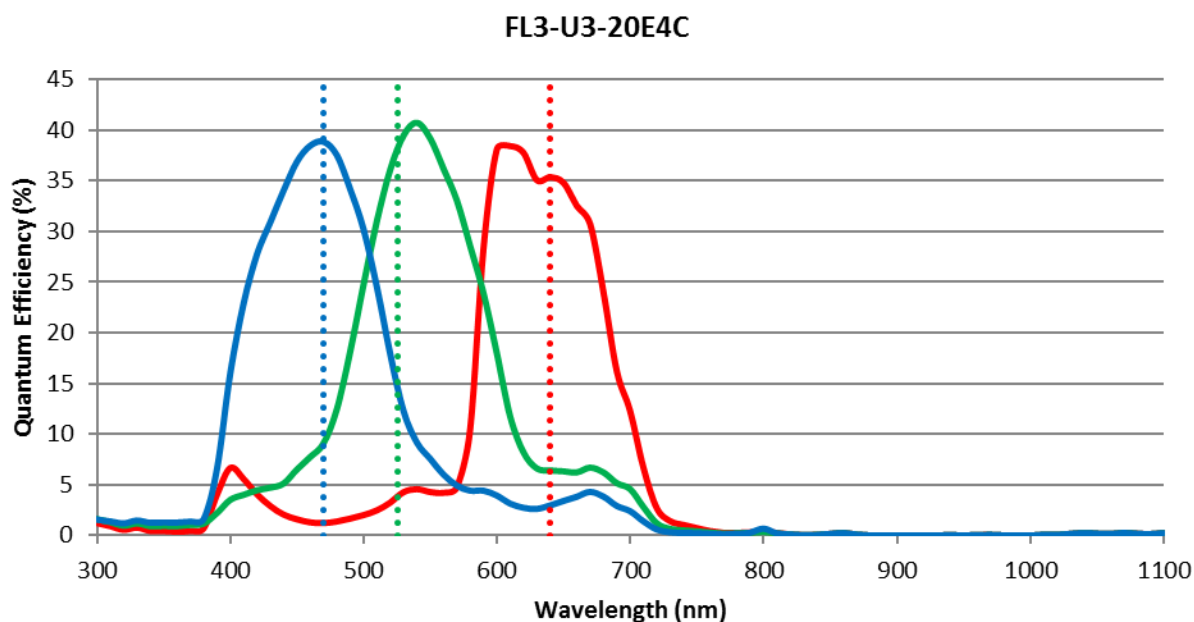


9 FL3-U3-32S2M-CS Imaging Performance

Measurement	Video Mode 0	Video Mode 7
Pixel Clock (MHz)	216	54
ADC (Bits)	12-bit	12-bit
Quantum Efficiency (% at 525 nm)	70	71
Temporal Dark Noise (Read Noise) (e-)	8.31	4.90
Signal to Noise Ratio Maximum (dB)	40.25	40.42
Signal to Noise Ratio Maximum (Bits)	6.69	6.71
Absolute Sensitivity Threshold (γ)	12.73	7.69
Saturation Capacity (Well Depth) (e-)	10601	11011
Dynamic Range (dB)	61.61	66.19
Dynamic Range (Bits)	10.23	10.99
Gain (e-/ADU)	0.19	0.19

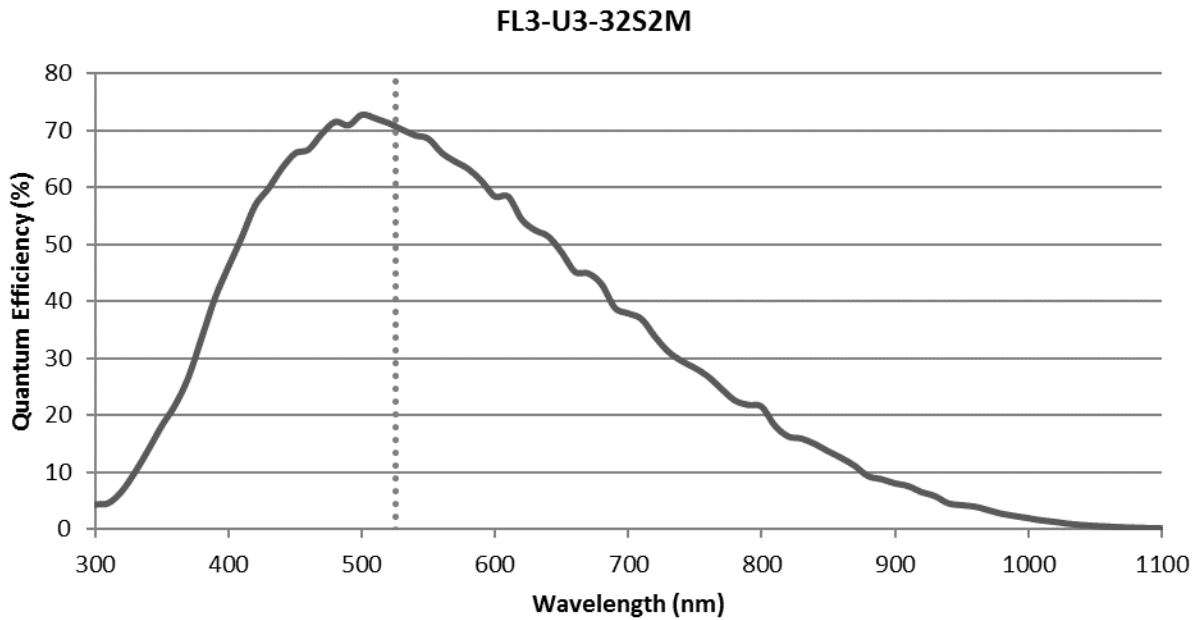

10 FL3-U3-32S2C-CS Imaging Performance

Measurement	Video Mode 0	Video Mode 7
Pixel Clock (MHz)	216	216
ADC (Bits)	12-bit	12-bit
Quantum Efficiency Blue (% at 470 nm)	48	49
Quantum Efficiency Green (% at 525 nm)	53	53
Quantum Efficiency Red (% at 640 nm)	39	39
Temporal Dark Noise (Read Noise) (e-)	9.16	5.31
Signal to Noise Ratio Maximum (dB)	40.22	40.26
Signal to Noise Ratio Maximum (Bits)	6.68	6.69
Absolute Sensitivity Threshold (γ)	19.17	11.43
Saturation Capacity (Well Depth) (e-)	10515	10604
Dynamic Range (dB)	60.74	65.23
Dynamic Range (Bits)	10.09	10.83
Gain (e-/ADU)	0.19	0.19

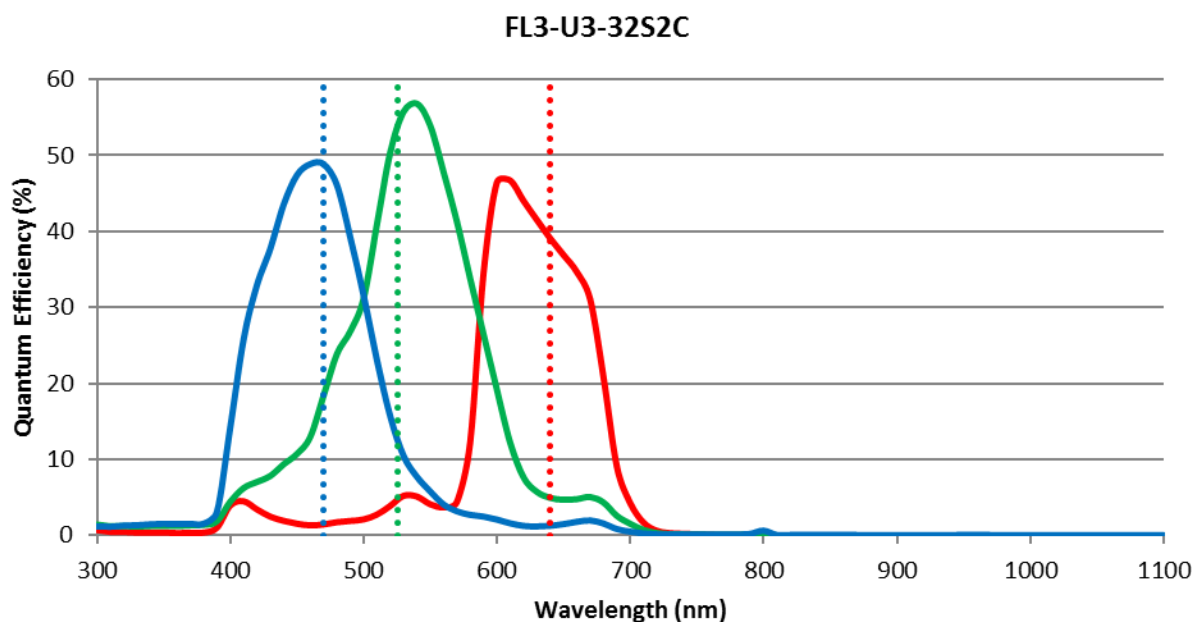

11 FL3-U3-120S3C-C Imaging Performance

Measurement	Video Mode 0
ADC (Bits)	12-bit
Quantum Efficiency Blue (% at 470 nm)	60
Quantum Efficiency Green (% at 525 nm)	72
Quantum Efficiency Red (% at 640 nm)	51
Temporal Dark Noise (Read Noise) (e-)	3.00
Signal to Noise Ratio Maximum (dB)	38.67
Signal to Noise Ratio Maximum (Bits)	6.42
Absolute Sensitivity Threshold (γ)	4.86
Saturation Capacity (Well Depth) (e-)	7363
Dynamic Range (dB)	66.46
Dynamic Range (Bits)	11.04
Gain (e-/ADU)	0.14

