

# EMVA 1288 IMAGING PERFORMANCE


# FLIR BLACKFLY<sup>®</sup>S

## BFS-U3-200S6-BD

Measurements are taken based on guidelines in the EMVA 1288 standard; the full definition can be found at EMVA.org. Camera settings are: maximum bit depth, 16-bit pixel format, and ISP disabled. The center wavelength is 525 nm unless otherwise noted. Results are captured at room temperature (20°C). Using FLIR test software version 4.1.

	BFS-U3-200S6M-BD	BFS-U3-200S6C-BD
<b>Resolution</b>	5472 x 3648	5472 x 3648
<b>Sensor</b>	Sony IMX183, CMOS 1"	Sony IMX183, CMOS 1"
<b>Pixel Size (µm)</b>	2.40	2.40
<b>Firmware</b>	1903.0.86.0	1903.0.86.0
<b>ADC</b>	12-bit	12-bit
<b>Quantum Efficiency Mono (% at 530 nm)</b>	80	N/A
<b>Quantum Efficiency Blue (% at 460 nm)</b>	N/A	63
<b>Quantum Efficiency Green (% at 530 nm)</b>	N/A	68
<b>Quantum Efficiency Red (% at 625 nm)</b>	N/A	43
<b>Temporal Dark Noise (Read Noise) (e-)</b>	3.27	3.29
<b>Temporal Dark Noise (Read Noise) (DN)</b>	13.80	13.91
<b>Signal to Noise Ratio Maximum (dB)</b>	41.77	41.76
<b>Signal to Noise Ratio Maximum (Bits)</b>	6.94	6.94
<b>Absolute Sensitivity Threshold (γ)</b>	4.72	5.54
<b>Absolute Sensitivity Threshold (e-)</b>	3.77	3.79
<b>Saturation Capacity (Well Depth) (e-)</b>	15032	15012
<b>Saturation Capacity (Well Depth) (γ)</b>	18807	21939
<b>Dynamic Range (dB)</b>	72.01	71.95
<b>Dynamic Range (Bits)</b>	11.96	11.95
<b>Gain (e-/ADU)</b>	0.24	0.24
<b>FLIR Software Version</b>	4.1.3.0	4.1.3.0

## BFS-U3-200S6M-BD

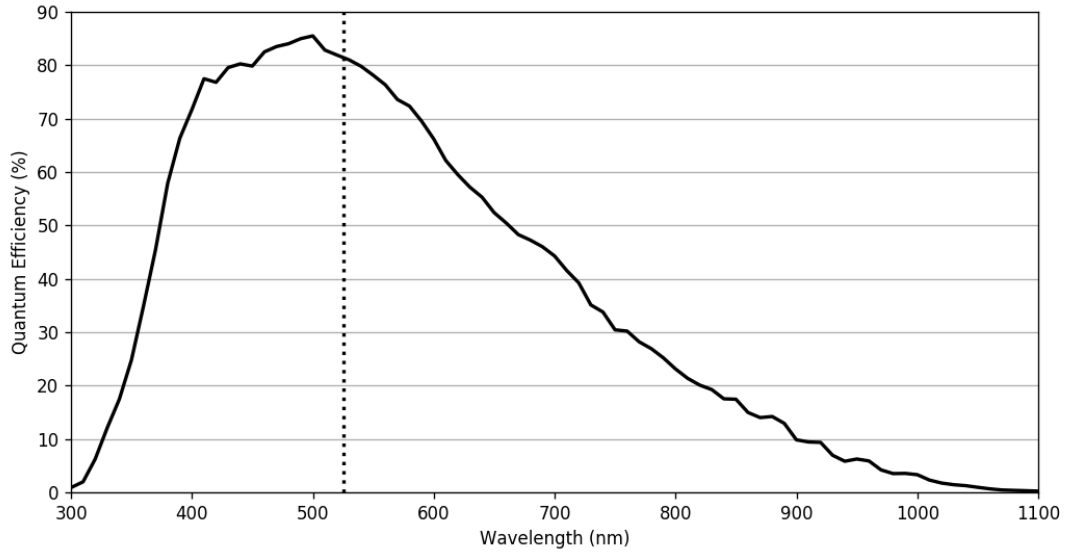

## BFS-U3-200S6C-BD

